


FIREPLACE KIT SYSTEM FROM BRUNNER




BSK 04 Tunnel with Stil-Tunnel 62/76

State: 2018-02-09

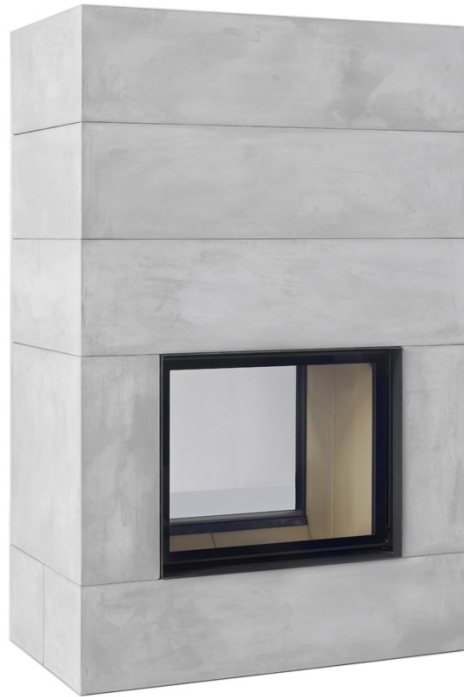

BRUNNER[®]
made in germany.

Dimension sheets - BSK 04 Tunnel with Stil-Tunnel 62/76

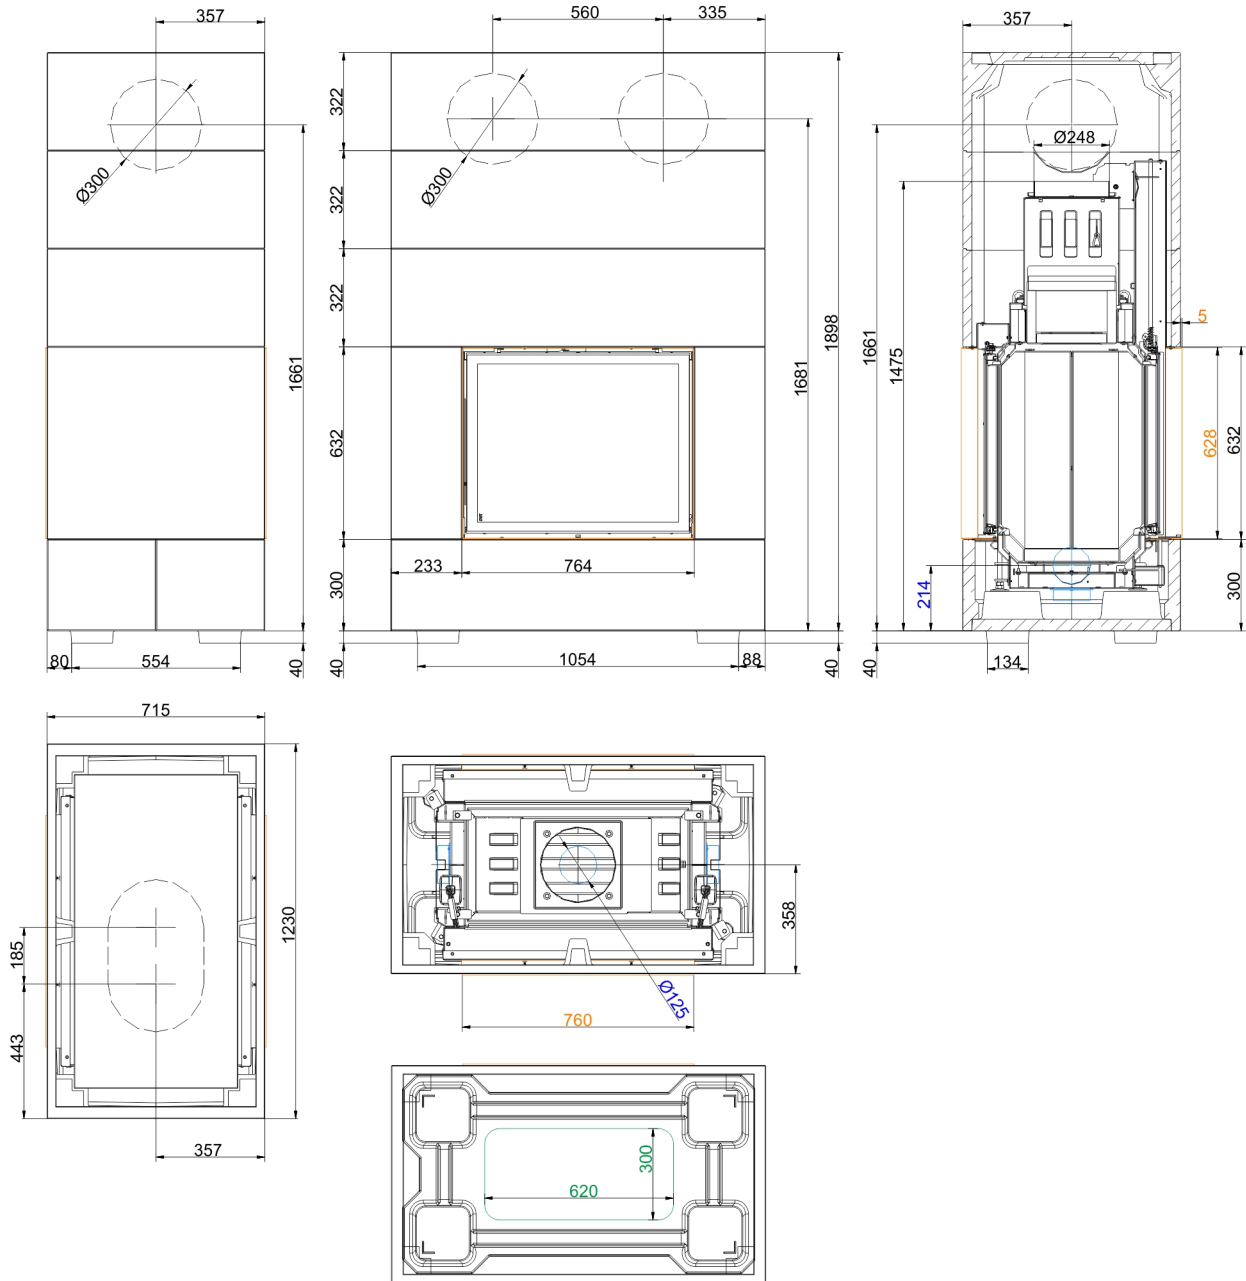

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
 Frames / front versions are marked colored.

Planning and installation - BSK 04 Tunnel with Stil-Tunnel 62/76

| | | |
|--|--|------------|
| Tested according to | | EN 13229 |
| Data for functional demonstration | | |
| Rated heat power | kW | 11 |
| Fire wood volume | kg/h | 3.2 |
| Flue gas mass flow | g/s | 10 |
| Flue gas temperature | g/s | 180 |
| Necessary supply pressure ¹⁾ | Pa | 13 |
| Combustion air consumption | m ³ /h | 35 |
| Combustion air connection Ø | mm | 125 |
| Cladding components | | |
| Foot print (W x D) | mm | 1230 x 715 |
| Overall height | mm | 1938 |
| Height of extension ring | mm | 322 |
| Minimal distances | | |
| to mounting wall | cm | 5 |
| to mounting wall with heat protection panels | cm | 0 |
| to combustible mounting wall | cm | 10 |
| to combustible mounting wall with heat protection panels | cm | 5 |
| from top of fireplace to ceiling | cm | 50 |
| Cross-section of gratings ²⁾ | | |
| Convection air | cm ² | 1540 |
| Supply air | cm ² | 1200 |
| Thermal insulation without / with air gratings | | |
| In ceiling region connection without/with air grate | cm | 22 / 16 |
| Weight | | |
| Total weight | kg | 781 |
| Meets requirement/limit values for: | | |
| Germany/ Austria / Suisse / Norway | 1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / - | |

1) Damper flap recommended

2) Openings for the air